


20' PREDATOR



This unit is equipped with a 16,000 lb leveling ratchet jack.

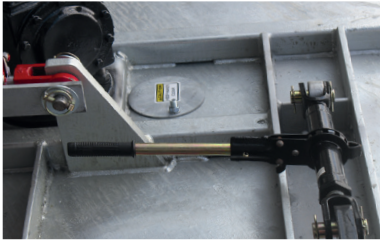

Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.



Triple Center Axles are standard on the 20' Predator. Shown here with optional used aircraft tires.



HOT-DIPPED GALVANIZED DECK & FRAME

NEW STYLE LEVELING TONGUE

DUAL WING WHEELS ARE STANDARD EQUIPMENT ON THE 20' PREDATOR.

CUTTING WIDTH 238"

OPTIONAL AIRCRAFT TIRES

FRONT & REAR CHAIN GUARD STANDARD

* Gearbox ratings based on field performance.

** The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

ITEM NUMBERS
001-1521 540
001-1520 1000

SPECIFICATIONS

Cutting Width. 238"	Main Gearbox or	Outboard Center or
Transport Width. 105"	Divider Box* 255 hp	Wings. Cat. 4 w/Slip Clutch
Overall Width. 246"	Outboard Gearbox	Deck Thickness. 3/16"
Overall Length. 204"	or Center & Wings* . . . 210 hp	Side Skirt. 1/4" x 10 1/4"
Cutting Height 2"-15"	Output Shaft Diameter. 2"	Replaceable Skid
Blade Overlap 5"	Cut Capacity 3"	Shoes Standard
Wing Lift Hydraulics. . . Standard	Blade Tip Speed:	Front Safety Chains. . . Standard
Wing Flex. 90° Up/22°	Main or Center 540 15,992 FPM	Rear Safety Deflectors: Rubber Guard
Down	1000 16,052 FPM	Standard with Rear Chain Option
Jackstand Standard	Wings 540 15,384 FPM	Weight (Approx). 6750 lbs
Hitch Swivel Clevis	1000 15,484 FPM	Standard Tires. Laminated
Blade Carrier Pan Stump Jumpers	Driveline Size:	600 x 9
Minimum PTO	Main. Cat. 5 Constant	Dual Wingwheels. Standard
HP Required 75 hp	Veloc.	Deck Rings to Protect Deck Standard

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.