





15' SUPER PREDATOR



Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

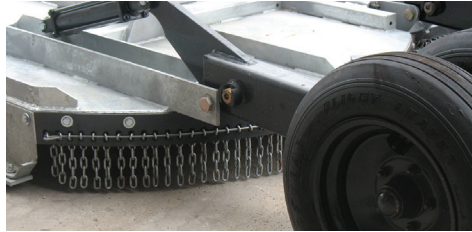

Front and Rear Chains, Dual Wing Wheels, Hydraulic Level Lift and Used Aircraft Tires are standard equipment on the 15' Super Predator.



Our updated hydraulic phasing level lift system is a superior improvement over mechanical lift system.

ITEM NUMBERS
001-1501-4 540
001-1507-4 1000

CUTTING WIDTH
180"



HOT-DIPPED GALVANIZED DECK & FRAME

* Gearbox ratings based on field performance.

** The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.



NEW STYLE LEVELING TONGUE



STANDARD AIRCRAFT TIRES



FRONT & REAR CHAIN GUARD STANDARD

SPECIFICATIONS

Cutting Width. 180"	Main Gearbox or Divider Box* 255 hp	Outboard Center or Wings Cat. 4 w/Slip Clutch
Transport Width. 90"	Outboard Gearbox or Center & Wings* 210 hp	Deck Thickness 3/16"
Overall Width. 187"	Output Shaft Diameter. 2-3/8"	Side Skirt 1/4" x 10 1/4"
Overall Length. 180"	Cut Capacity 3-1/2"	Replaceable Skid
Cutting Height 2"-15"	Blade Tip Speed:	Shoes Standard
Blade Overlap 6"	Main or Center 540 15,268 FPM	Safety Chains Standard (Front & Rear)
Wing Lift Hydraulics. . . Standard	1000 15,072 FPM	Weight (Approx). 6000 lbs.
Wing Flex. 90° Up/22° Down	Wings 540 15,016 FPM	Standard Tires Used Aircraft Tires
Jackstand Standard	1000 14,996 FPM	Dual Wingwheels. Standard
Hitch Swivel Clevis	Driveline Size:	Deck Rings to Protect Deck Standard
Blade Carrier Pan Stump Jumpers	Main. Cat. 5 Constant Veloc.	
Minimum PTO HP Required 55 hp		

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.