


10' OFFSET FLEX PREDATOR

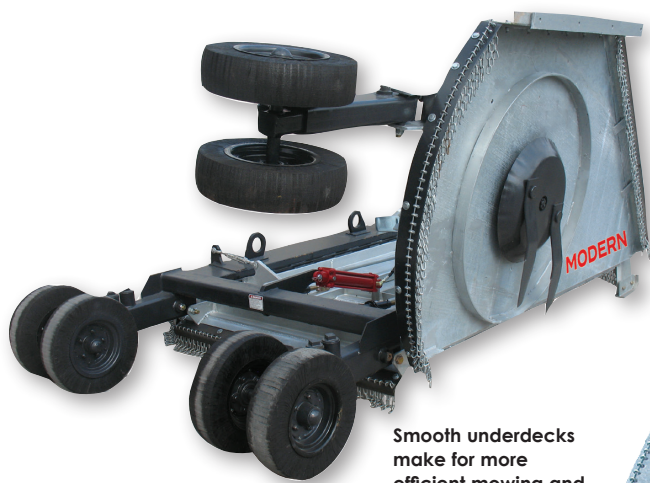

THE 10' FLEX OFFSET PREDATOR HAS A 255 HP TRANSFER GEARBOX WITH 210 HP CENTER

Shown with optional dual wingwheel


Available with left or right weight box. (specify with order)

Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

ITEM NUMBERS

- 001-1030 LW
- 001-1020 RW

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.

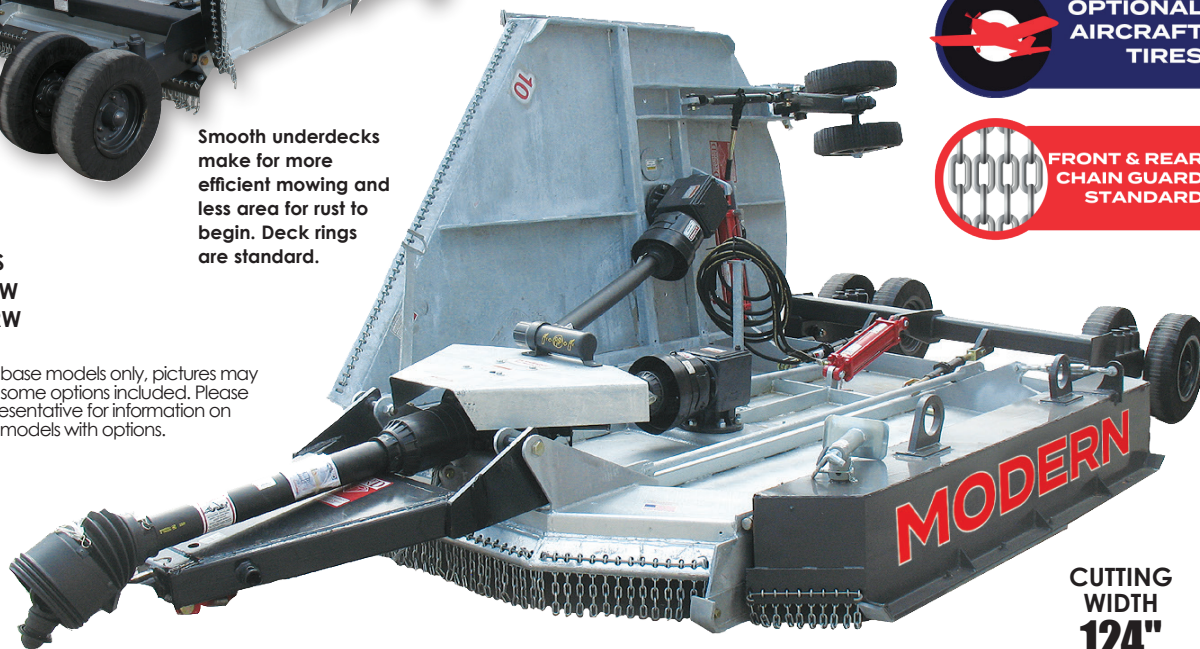

CUTTING WIDTH 124"



HOT-DIPPED GALVANIZED DECK & FRAME



NEW STYLE LEVELING TONGUE



OPTIONAL AIRCRAFT TIRES



FRONT & REAR CHAIN GUARD STANDARD

SPECIFICATIONS

Cutting Width. 124"	Minimum PTO	Outboard
Transport Width. 96"	HP Required 55 hp	or Center wings Cat. 4 w/Slip Clutch
Overall Width. 140"	Main Gearbox	Deck Thickness 3/16"
Overall Length. 180"	or Divider Box* 255 hp	Side Skirt 1/4" x 8"
Cutting Height 2" - 13"	Outboard Gearbox	Replaceable Skid
Blade Overlap 6"	or Center & Wings* 210 hp	Shoes Standard
Wing Lift Hydraulics. . . Standard	Output Shaft Diameter. 2-3/8"	Safety Chains Standard (Front & Rear)
Wing Flex. 90° up / 22° down	Cut Capacity 3-1/2"	Weight (Approx). 4900 lbs.
Jackstand Standard	Blade Tip Speed:	Standard Tires. Laminated 600 x 9
Hitch Swivel Clevis	Main or Center 540 . . . 15,268 FPM	Dual Wingwheels. Option
Blade Carrier Pan Stump Jumpers	Outboard 540. 15,016 FPM	Hydraulic Level Lift . . . Option
	Driveline Size:	Deck Rings to Protect Deck Standard
	Main-Pull Type. Cat. 5 Constant Velocity	

* Gearbox ratings based on field performance.

** The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

