


# 7' PREDATOR

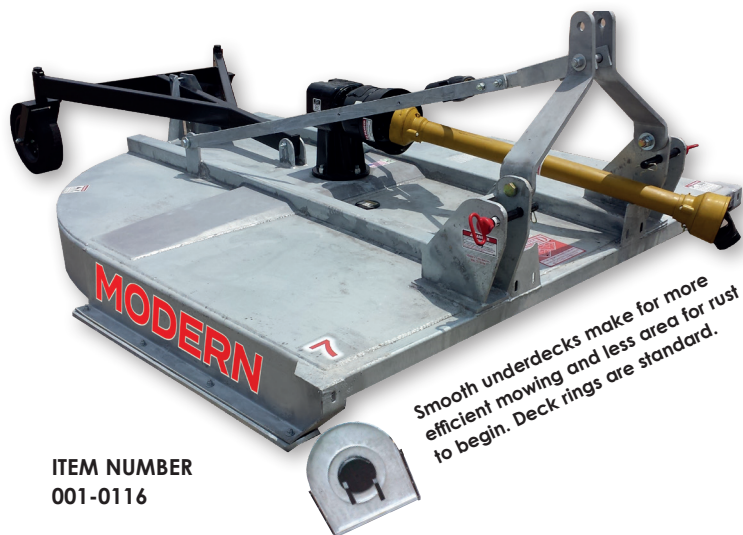


Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

ITEM NUMBER  
001-0116

**Features:**

- 3/8" gearbox plate
- Heavy duty stump jumper & slip clutch
- Laminated tailwheel
- Solid 3/16" (7 Gauge) Deck
- Double Hitch PIN Connection
- Quick Hitch Compatible
- 3/4" A-Frames
- Dual tail wheels standard
- Cat II. Hitch



**CUTTING WIDTH**  
**84"**

**THE 7' PREDATOR IS A CAT. 2 HITCH WITH A 140 HP GEARBOX AND A CAT. 5 HEAVY DUTY SLIP CLUTCH DRIVELINE.**



**DUAL TAILWHEELS ARE STANDARD EQUIPMENT.**

## SPECIFICATIONS

Cutting Width. . . . . 84"	Main Gearbox or Divider Box* . . . . . 140 hp	Replaceable Skid Shoe . . . . . Standard
Transport Width. . . . . 90"	Output Shaft Diameter. 2-3/8"	Front Safety Deflectors Chain Option
Overall Width. . . . . 90"	Cut Capacity . . . . . 4"	Rear Safety Deflectors: Rubber Guard Standard with Chain Option
Overall Length. . . . . 100"	Blade Tip Speed: 540. . . . . 17,494 FPM	Weight (Approx). . . . . 1750 lbs.
Overall Height . . . . . 2" - 12"	Driveline Size. . . . . Cat. 5 w/Slip Clutch	Standard Tires. . . . . Laminated
Blade Overlap . . . . . 3"	Deck Thickness . . . . . 3/16"	Dual Tailwheels . . . . . Standard
Hitch . . . . . Quick Attach Cat. II	Side Skirt. . . . . 1/4" x 8"	Deck Ring to Protect Deck . . . . . Standard
Blade Carrier . . . . . Pan Stump Jumpers		
Minimum PTO HP Required . . . . . 50 hp		

\* Gearbox ratings based on field performance.

\*\* The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.