


THE 4', 5', & 6' COMPETITOR

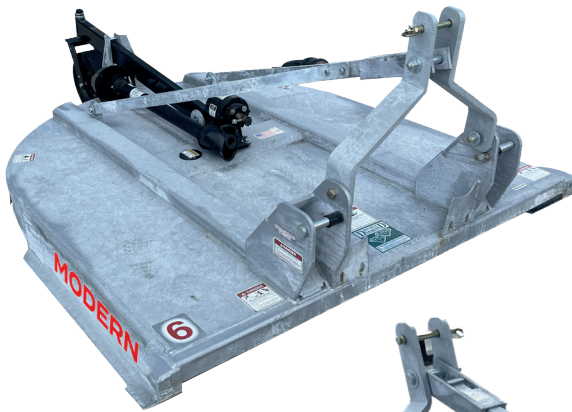

- Available Quick Attach
- 1/2" A-Frames
- Quick Hitch Compatible
- Cat. I Hitch
- Cat. I & Cat. II Hitch for 6' Only

Features:

- New heavy duty 3/8" Gearbox Plate
- Single piece body with smooth top
- Stronger A-Frame, tailwheel boom and bracket
- Smooth rounded rear deck
- Solid top weld with double steel wall top edge
- Heavy duty stump jumper with laminated tailwheel
- Shear pin protection
- 48 hp gearbox rating
- Slip clutch option available


HOT-DIPPED GALVANIZED DECK & FRAME

FRONT & REAR CHAIN GUARD OPTIONAL
**4' CUTTING WIDTH
48"**
**5' CUTTING WIDTH
60"**
**6' CUTTING WIDTH
72"**


Smooth underdecks make for more efficient mowing and less area for rust to begin.

THE COMPETITOR HAS A CAT. 3 DRIVELINE AND A NEW HEAVY DUTY 3/8" GEARBOX PLATE!



SPECIFICATIONS

Cutting Width.	48"- 60"-72"	Minimum PTO HP Required:	Deck Thickness:
Transport Width.	53"- 65"-75"	48"	48" 10 GA
Overall Width.	53"- 65"-75"	60"	60" 3/16"
Overall Length.	83"-100"-106"	72"	72" 3/16"
Cutting Height	2" - 10"	Cut Capacity	2"
Hitch	Cat. I & Cat. II Quick Attach*	Blade Tip Speed:	Slip Clutch Protection . Option
Blade Center	Pan Stump Jumper	48"	13.215 FPM
Gearbox Rating*	48 hp	60"	16.519 FPM
Quick Attach	Option	72"	14.995 FPM
		Driveline Size.	Cat. 3
			Front Safety Deflectors Chain Option
			Rear Safety Deflectors:
			Rubber Guard Standard with Chain
			Option Weight (Approx):
			48" 420 lbs
			60" 608 lbs
			72" 715 lbs
			Tires. Laminated
			Side Skirt 1/4" x 8"


ITEM NUMBERS
 001-0011
 001-0013
 001-0015-CAT

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.

 * 4' & 5' are Cat I
 **6' offer Cat I & Cat II