

PATHSLAYER



FEATURES:


- Minimum 50 HP
- 11 cutting positions
- Heavy duty construction
- Hot dipped galvanized deck for long life
- Continuous welding – no skip welding
- Open front design
- Ability to cut from 0 degree to 90 degrees
- 44" Cutting width
- 2" Splined output shaft
- Covered by a 1-year residential manufacturing defect warranty
- 1/2" X 4" Hardened Steel Rotary Cutter Blades & Blade Bolts
- Heavy Duty Gearbox & Hydraulic gear pump
- Cut up to 3" vegetation
- Made for tractors only
- Recommended HR30

Modern Ag Products Path Slayer is an extremely well built, versatile, hydraulic direct drive brush cutter designed to take care of difficult mowing chores. The Path Slayer is a front-end loader mounted brush cutter designed to tackle jobs such as vertical road and hunting lane cutting. It is ideal for maintaining trails, slopes, lakes, retaining ponds, ditches and plantation rows. The Path Slayer is made for tractors only and not meant for skid steer use. It is made by Modern Ag Products, so you know it is built to last.



ITEM NUMBER
001-0044

NO SKID STEER

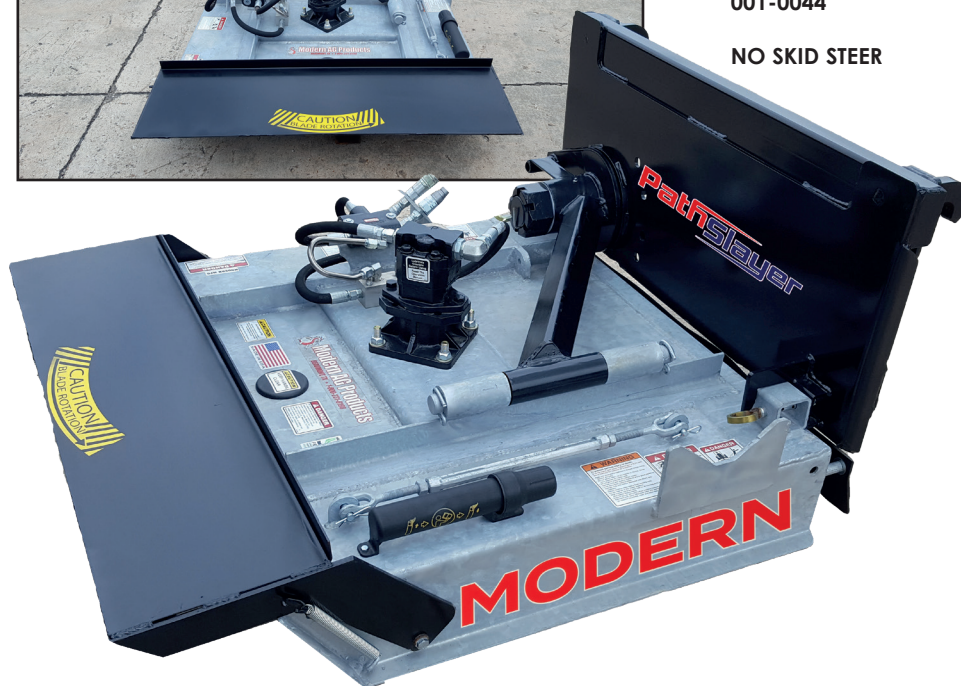

Any tractor with less than 8 gallon hydraulic reservoir must have HR30 to run properly.

SPECIFICATIONS

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> • Cutting Width – 44" • Overall Width – 50" • Overall Length – 47" • Overall Height – 29" • Cutting Height – 2" • Cutting Positions – 11 Hitch – SS Universal, JD 400 & 500 Pin series, Euro | <ul style="list-style-type: none"> • Hydraulic Flow – 7 – 21 GPM (Not designed for skid-steer use) • Blade Carrier – Pan Stump Jumper • Output Shaft Diameter – 2" Splined • Cut Capacity – Up to 3" | <ul style="list-style-type: none"> • Blade Tip Speed – 17,500 ft./min @ 10 gpm • Deck Thickness – 3/16" (7 gauge) • Side Thickness – 3/16" (7 gauge) • Rear Band Guard – Standard • Minimum Required Tractor • Weight – 3,250 lbs. • Weight – 577 lbs. |
|---|--|---|

Must read and understand operation manual prior to operation.

DEALER IS BEST ABLE TO DETERMINE IF YOUR TRACTOR IS SUITABLE FOR THIS UNIT.